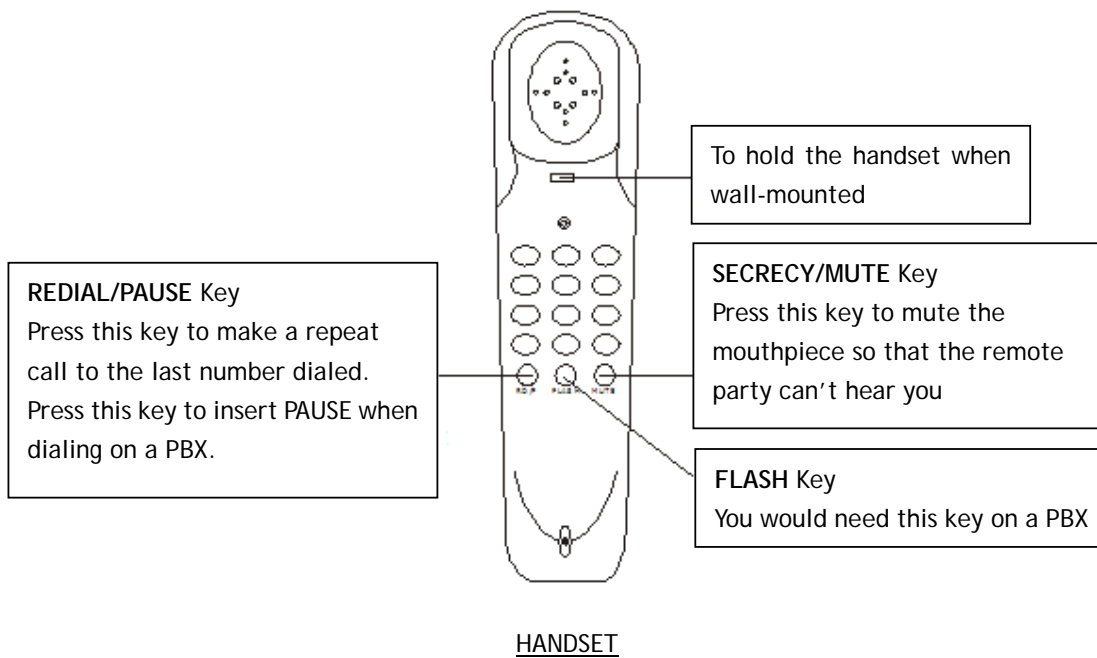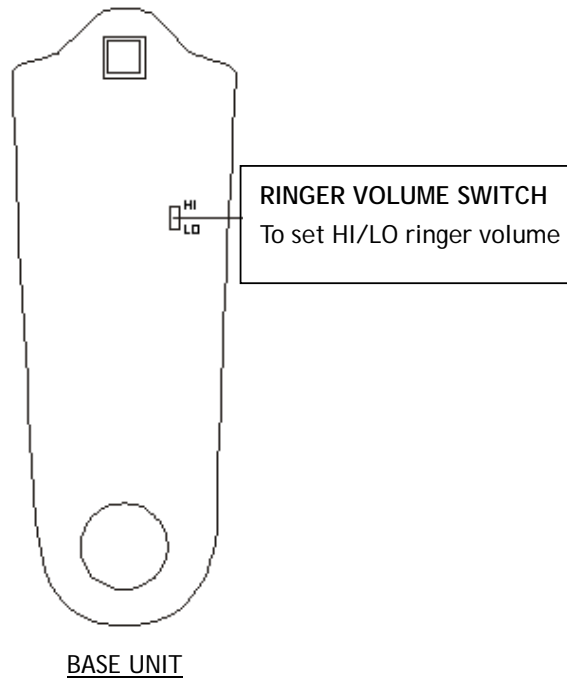# SB2111 User Guide

Shiro

> **!** Please ensure the phone is placed in a dry and ventilated place without corrosive air.

FEATURES:

a) HI/LO ringing volume selection
b) Redial, Pause, Flash and Mute function
c) Desktop/wall-mountable

OPERATION:

To hold the handset when wall-mounted

REDIAL/PAUSE Key
Press this key to make a repeat call to the last number dialed.
Press this key to insert PAUSE when dialing on a PBX.

SECRECY/MUTE Key
Press this key to mute the mouthpiece so that the remote party can't hear you

FLASH Key
You would need this key on a PBX

HANDSET

SB2111 User Guide

Shiro

RINGER VOLUME SWITCH
To set HI/LO ringer volume

1) Making and Answering Calls

To make a call, just lift the handset and wait for dial tone. Then, dial the telephone number using the keypad.

2) Redial Function:

To make a repeat call to the last number dialed (up to 32 digits), just lift handset and wait for dial tone. Then press **LNR** key.

3) Secrecy/Mute Function:

While you are on the line, if you do not want the remote party to hear you, just press and hold the **MUTE** key.

4) Using on a PBX:

If you need to use SB2111 on a PBX and the PBX User Guide instructed the use of **RECALL/FLASH** to transfer an external call to an internal party, press the **FLASH** key.

On some PBXs, you will need to wait for a second dial tone after dialing external line access digit (e.g. "9"). You might need to insert PAUSE when making calls, so that the redial function will work.

- To make a call:
  1. Press the external line access digit and then press **PAUSE** key
  2. Dial the telephone number